

CONTROL UNIT FOR TERMINAL BOX K18

BACKER

Description

Intended for cartridge IU611, 611R

Power stage 0 - ¼ - ½ - ¾ - 1

Provided with 2 hours switching delay on the half effect during power outage. Provided with contactors for the switching delayed part. If desired, half of the effect can be deactivated, in case of overloading, via current relay.

4 pole thermostat 30-90°C

3 pole temperature limiter 110°C

Timer and contactor


Technical specification

Title

Item number

S18A

1120 550 701

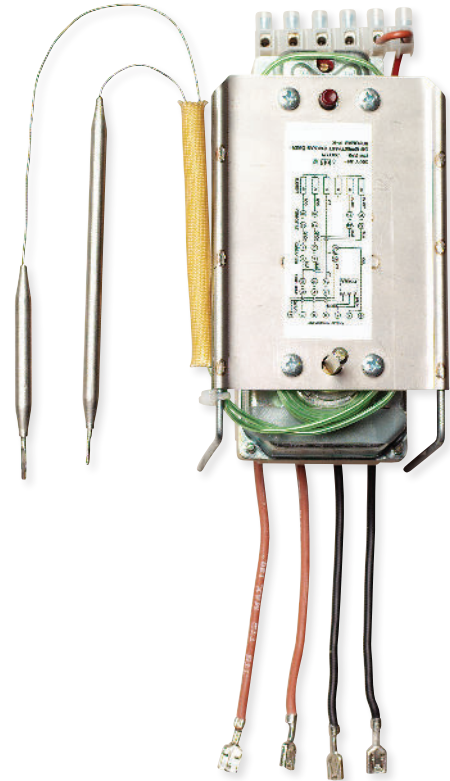

Wiring diagram

