

## WET-AREA FULL-COVERAGE DRUM/PAIL HEATERS & INSULATORS

### Features & Benefits

- ▶ Extra-durable, water resistant design for indoor/outdoor use and in wash-down environments — IP54
- ▶ Insulated, full-coverage design
- ▶ Heater has easy-to-program digital controller: Adjustable up to 140° F (60° C)
- ▶ Lightweight and easy to install with adjustable buckles
- ▶ Suitable for both metal and plastic drums/pails
- ▶ Ideal for a wide range of environments including outdoor and wash-down locations
- ▶ Even heat distribution and maximum energy efficiency
- ▶ Easy-to-use — simple plug-and-play design
- ▶ Reusable and rugged — long service life
- ▶ Safe — heater has unique 360° grounded heating element and cool-touch surface for your safety


**NEW!**



Insulator — Pairs nicely with BriskHeat® silicone rubber drum heaters



**Moisture  
& Chemical  
Resistant**



**Plug & Play**



Heater — All-in-one, plug-and-play solution



Easy-to-program digital controller



Adjustable nylon straps with buckles

## WET-AREA FULL-COVERAGE DRUM/PAIL HEATERS & INSULATORS

### Specifications

**Outer Material:** Extra-durable polyester cloth  
**Insulation:** 0.5 in (13 mm) thick closed-cell melamine  
**Closure Method:** Adjustable straps with buckles  
**Maximum Exposure Temperature:** 180°F (82°C)  
**IP Rating:** IP54

### Heater Specifications

**Operating Temperature:** Up to 140°F (60°C)  
**Digital Control:** Programmable in °F and °C  
**Built-in High-Limit Safety Thermostat:** 185°F (85°C)  
**Heating Element:** 360° grounded heating element for your safety  
**Dielectric Strength:** Over 2000 volts  
**Power Cord:** 6 ft (1.8 m) long  
 – 120 VAC: 3-prong grounded plug (NEMA 5-15P)  
 – 240 VAC: 3-prong grounded plug (NEMA 6-15P)



Certified to UL safety standards  
 Approval is for heater

### Ordering Information

#### Heaters


Part No. 120 VAC	Part No. 240 VAC	Size gal (l)	Minimum Diameter in (mm)	Maximum Diameter in (mm)	Height in (mm)	Total Watts	Weight lbs (kg)
FGPDHWC5120DV	FGPDHWC5240DV	5 (19)	10.8 (274)	12.4 (315)	13.5 (343)	165	6 (2.4)
FGPDHWC15120DV	FGPDHWC15240DV	15 to 16 (57 to 61)	14.3 (363)	15.9 (404)	26.7 (678)	210	8 (3.3)
FGPDHWC30120DV	FGPDHWC30240DV	30 (114)	18.8 (478)	20.3 (516)	29.5 (749)	300	10 (4.2)
FGPDHWC55120DV	FGPDHWC55240DV	55 (208)	22.2 (564)	24.2 (615)	36.4 (924)	600	13 (5.6)

#### Insulators

Part No.	Size gal (l)	Minimum Diameter in (mm)	Maximum Diameter in (mm)	Height in (mm)	Weight lbs (kg)
FGDIW5V	5 (19)	9.8 (249)	11.7 (297)	13.5 (343)	3 (1.4)
FGDIW15V	15 to 16 (57 to 61)	12.7 (323)	14.6 (371)	26.7 (678)	5 (2.3)
FGDIW30V	30 (114)	17.5 (444)	19.4 (493)	29.5 (749)	7 (3.2)
FGDIW55V	55 (200-208)	21.1 (536)	22.9 (582)	36.4 (924)	10 (4.5)



55-gallon (208 liters)  
insulator cover

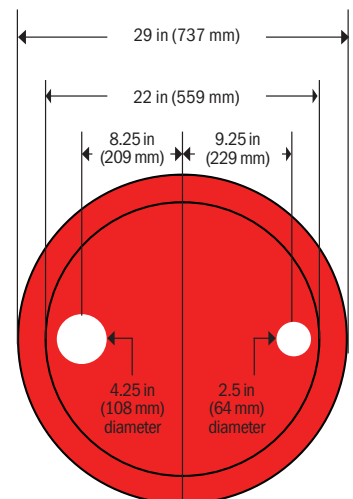

Heater  
(FGDHW series)



Insulator  
(FGDIW series)

#### Heated Area:

- 55 and 30-gallon size (208 and 114 liter): Lower two thirds
- 15 and 5-gallon size (61 and 19 liter): Lower third

### Accessories

Part No.	Description	Diameter
FGDWC55V	Insulating cover; 55 gallon (208 liters)	22 to 29 in (559 to 737mm)