

Features & Benefits

- Self-supporting design can be placed directly on countertop
- Low-watt density
- Temperatures up to 900 °F (482 °C)
- Safe alternative to other heating methods like a Bunsen burner
- Easy viewing of flask contents
- Stackable for easy storage



Specifications

Maximum Exposure Temperature: 900 °F (482 °C)

Heating Element: Multi-stranded resistance wire for increased durability. Knit and braided for uniform heat coverage

Voltage: 120 or 240 VAC

Power Leads: 6 ft (1.8 m) long with

- 120 VAC: 2-prong plug (NEMA 1-15P)
- 240 VAC: NEMA 6-15 plug

IP Rating: IP20




**Temperatures
Up to
900 °F (482 °C)**



Ordering Information

HM0050VF1	HM0050VF2	50	52
HM0100VF1	HM0100VF2	100	70
HM0250VF1	HM0250VF2	250	143
HM0500VF1	HM0500VF2	500	210
HM1000VF1	HM1000VF2	1000	377
HM2000VF1	HM2000VF2	2000	520
HM3000VF1	HM3000VF2	3000	550
HM5000VF1	HM5000VF2	5000	620

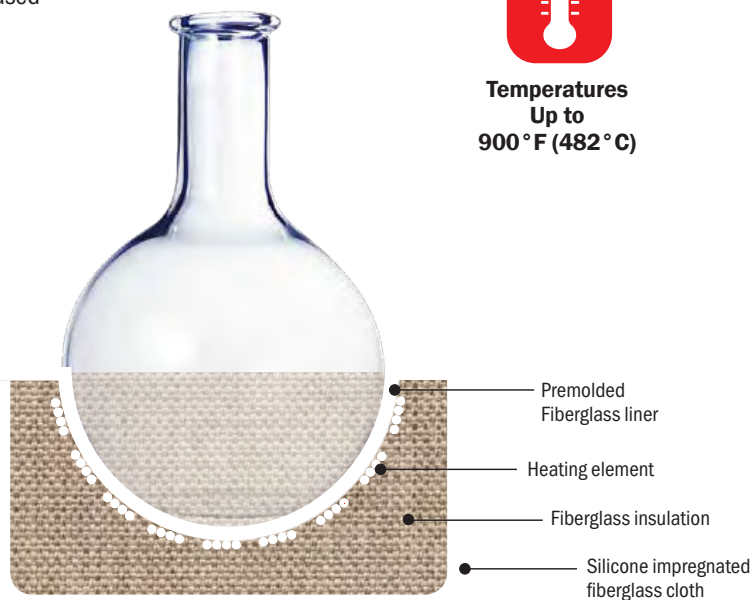

IMPORTANT: Temperature controller is required for these products. See options starting on page 145.

Custom Sizes and Designs Available: Contact BriskHeat® or your local distributor for more information.